

HEAVY DUTY HIGH SIDE BUND APR FRAME & BUFFER TANK

Features and Benefits

Field Proven Design
Reduced Contamination
Minimal Residual

Usage




Storage
Decanting

Capacities

1,100 litre

Applications

General Chemicals
Lube Oils
Hydraulic Oils

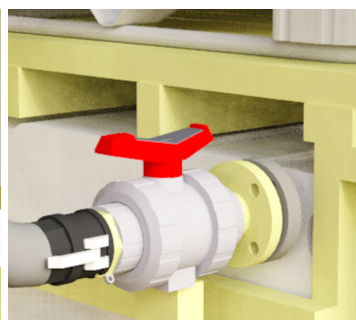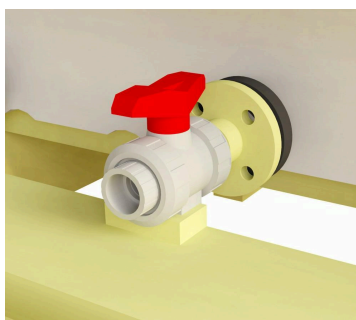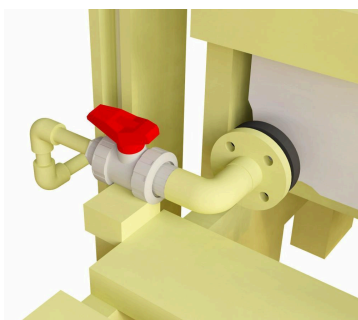

Standard Equipment

- Discharge: 1" ball valve c/w camlock.
- Fill: 1" ball valve c/w camlock.
- Vent: 2" Pipe rising above the height of the IBC and returning into the bund

Materials

Materials

- Bund: Rotomoulded LLDPE
- Frame: 140 x 40mm WPC
- Camlocks: Polypropylene
- Valves: GF+ 546 UPVC
- Buffer Tank: Rotomoulded LLDPE

Options

- Dry break couplings
- IBC tie down straps
- IBC UV cover
- IBC to tank hose
- Hose park
- Integral skids
- Sight glass
- Lute pot

Product Code	Dimension	Weight
BHSDGPS	1531 x 1986 x 2208 mm	373 kg